



Smart Heatsinks
Unlike Any Others

SHS R - SERIES HEAT SINK for Variety of TO Series devices



R - Series Heat Sinks



Smart Heatsinks, Inc. introduces the low cost, R-series, standard heat sinks for single and/or dual TO-264, TO-247, TO-220 and TO-218, devices. This simple heat sink can hold one TO device with adjustable height, and can be mounted simply by soldering onto PCB. The heat sink has two types of surface finishes, and can be used in either natural (free) or forced convection cooling applications.
Cross reference to AAVID P/N: 532602B02500G Series


SPECIFICATOINS

Heat Sink: Aluminum Alloy 6063-T5 or Equivalent with either degreased or black anodized finish.

Solder Feet: Pure tin plated brass

Mounting: Vertical through-hole PCB soldering


Compliance: Either degreased or black anodized finished parts are compliant with RoSH.

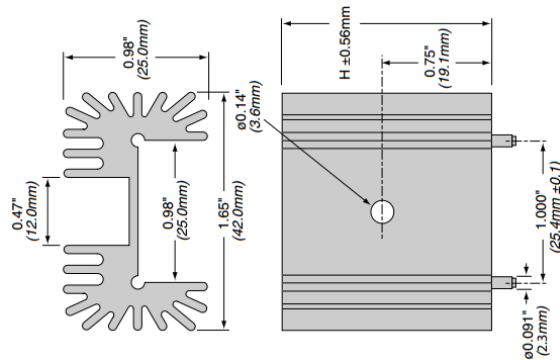

Standard Part Number	Height "H" (in / mm)	Surface Area (in ² / mm ²)	Weight (oz / g)	Thermal Resistance*	LAND PATTERN
RV-T220-25E RA-T220-25E	1.0 / 25.4	13.8 / 8,901	0.88 / 25	6.0 °C/w 4.9 °C/w	
RV-T220-38E RA-T220-38E	1.5 / 38.1	20.1 / 12,983	1.34 / 38	4.8 °C/w 3.9 °C/w	
RV-T220-51E RA-T220-51E	2.0 / 50.8	26.5 / 17,065	1.80 / 51	4.4 °C/w 3.5 °C/w	
RV-T220-64E RA-T220-64E	2.5 / 63.5	32.8 / 21,148	2.22 / 63	3.9 °C/w 3.1 °C/w	

*Natural Conduction

THERMAL PERFORMANCE

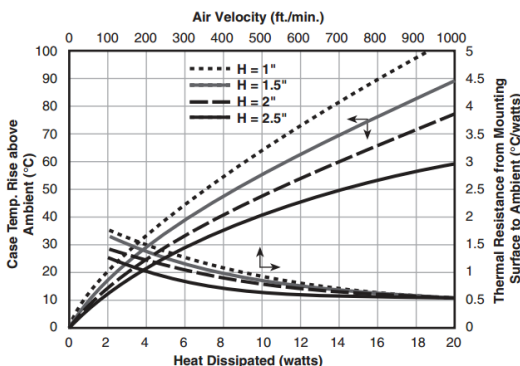

ORDERING INFORMATION

Standard P/N	Descriptions	Packaging
RV-T220-25E	Degreased, 25.4mm height	Bulk
RA-T220-25E	Black Anodized, 25.4mm HT	Bulk
RV-T220-38E	Degreased, 38.1mm height	Bulk
RA-T220-38E	Black Anodized, 38.1mm HT	Bulk
RV-T220-51E	Degreased, 50.8mm height	Bulk
RA-T220-51E	Black Anodized, 50.8mm HT	Bulk
RV-T220-64E	Degreased, 63.5mm height	Bulk
RA-T220-64E	Black Anodized, 63.5mm HT	Bulk